



STYLE  
7000  
BLACKOUT FABRIC

---

WEAVING  
EXCELLENCE  
WITH  
INNOVATION



Code	Color	SOLAR OPTICAL PROPERTIES				SHGC/G VALUE g-tot (glass & blind)	
		TS	RS	AS	TV	SINGLE 1/4 CL	INSULATING 1 HA
<b>STYLE 7000 - BLACKOUT</b>							
P63	Birch	0	74	26	0	0.21	0.18
Q00	Merino	0	72	28	0	0.23	0.19
Q57	Wheat	0	75	25	0	0.21	0.18
U67	Canvas	0	73	27	0	0.22	0.19
P62	White	0	74	26	0	0.21	0.18
P64	Sand	0	73	27	0	0.22	0.19
Q58	Mushroom	0	70	30	0	0.23	0.20
U69	Cocoa	0	72	28	0	0.23	0.19
V41	Canyon	0	74	26	0	0.21	0.19
V39	Graphite	0	71	29	0	0.23	0.19
V70	Porpoise	0	73	27	0	0.23	0.19
V40	Onyx	0	72	28	0	0.23	0.19



PRODUCT CERTIFIED FOR  
LOW CHEMICAL EMISSIONS  
UL.COM/GG  
UL 2818



**BEST ENERGY  
EFFICIENT  
SOLUTION**



TS = Solar Transmittance  
RS = Solar Reflectance  
AS = Solar Absorptance  
TV = Visual Transmittance

SHGC = Solar Heat Gain Coefficient


1/4 CL = 1/4" Clear Glass  
1 HA = 1" Heat Absorbing Glass

Fabrics Installed Internally  
Zero-Degree Profile Angle

For additional performance values,  
test references and technical  
definitions visit us at [phifer.com](http://phifer.com).



P62 **White**

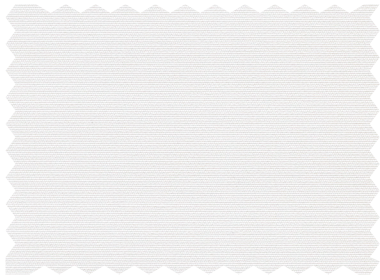


P64 **Sand**




P63 **Birch**




Q57 **Wheat**

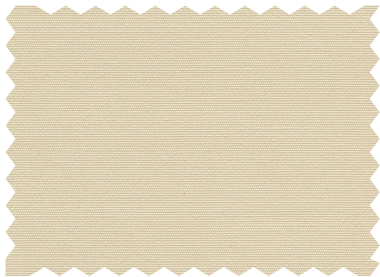


Q00 **Merino**

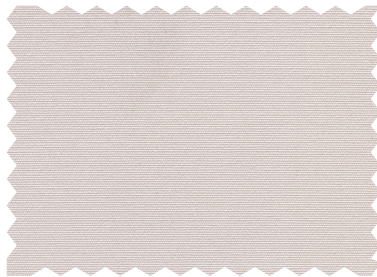

V41 **Canyon**

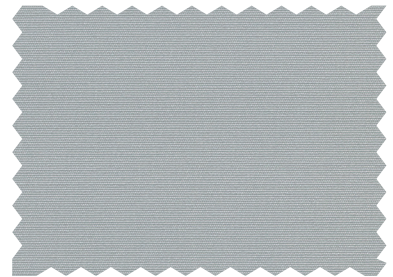


U67 **Canvas**

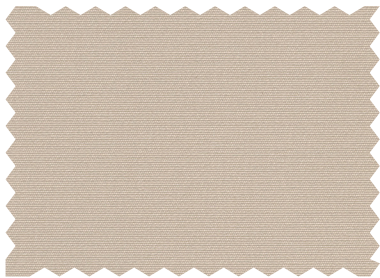


Q58 **Mushroom**



V70 **Porpoise**

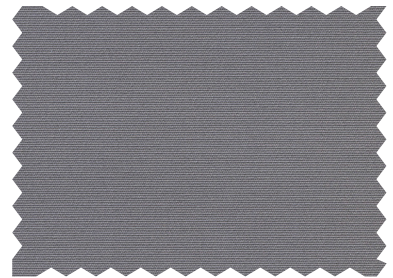

V39 **Graphite**

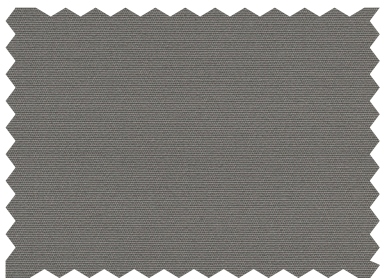

U69 **Cocoa**



V40 **Onyx**



# STYLE 7000 SPECIFICATIONS

Style 7000 is uniquely designed to provide total light blockage when complete room darkening is needed. With a broad range of decorator colors, the look and feel of rich cloth and a PVC-free composition, Style 7000 will enhance the beauty and function of both commercial and residential spaces. All Style 7000 colors have an off-white backing.

**FIRE CLASSIFICATION** California U.S. Title 19 (small scale) NFPA 701 TM#1 (small scale) BS 5867 Part 2 Type B Performance IBC Section 803.1.1 (Class A Rating) NFPA 101 (Class A Rating) CAN/ULC-S 109 (large and small scale) CAN/CGSB2-4.162-M80

*Fire classifications are subject to change. Please go to [phifer.com](http://phifer.com) for the most current information.*

**BACTERIA AND FUNGAL RESISTANCE** ASTM G21-96

**ENVIRONMENTAL CERTIFICATION** GREENGUARD GREENGUARD Gold Certified to these standards for low chemical emissions into indoor air during product usage

**SAFE USE** RoHS Compliant ANSI/WCMA A 100.1-2007 for lead content US Consumer Product Safety Commission Section 101

**WARRANTY** 5-year interior

**ACOUSTICAL PERFORMANCE** NRC (Noise Reduction Coefficient) and SAA (Sound Absorption Average) tested in accordance with ASTM C423-09a

**UV PROTECTION** SheerWeave sun control fabrics are an effective way to reduce harmful UV rays. Phifer Incorporated is a proud member of the Skin Cancer Foundation's Corporate Council.

**CLEANING INSTRUCTIONS** Fabric should be regularly dusted/vacuumed as appropriate. If commercial spot cleaners are used, they must first be tested and allowed to dry on an inconspicuous area to ensure compatibility.

*Railroading this fabric is not recommended.*

*Colors may vary slightly from swatch samples. All variations are within industry standards.*

## STYLE 7000

<b>WIDTHS</b>	94" and 118" 238.8 cm and 300 cm
<b>ROLL LENGTH</b>	30 Linear Yards 27.4 Linear Meters
<b>COMPOSITION</b>	100% Polyester with Acrylic Flocked Backing
<b>MESH WEIGHT</b>	12.4 oz/yd <sup>2</sup> 420.43 g/m <sup>2</sup>
<b>FABRIC THICKNESS</b>	0.029 in 0.74 mm
<b>OPENNESS FACTOR</b>	Opaque
<b>ACOUSTICAL VALUE</b>	NRC .10 / SAA .08

**PHIFER**  
INCORPORATED

P. O. Box 1700 • Tuscaloosa, Alabama 35403-1700 USA  
Phone: 205.345.2120 • FAX: 205.391.0799  
Toll Free USA/Canada: 1.800.221.5497  
[phifer.com](http://phifer.com) • ISO Registered



© SheerWeave is a registered trademark of PHIFER INCORPORATED.  
™ UL, the UL logos and the UL mark are trademarks of UL LLC.  
Photo courtesy of Draper Inc., Spiceland, Indiana, USA.  
© PHIFER INCORPORATED V24 061324 3033842