

Privacy | <1% openness

Privacy | 0% openness | Blackout

# Avila Daylight™ & Avila Twilight™

## Specifications

Item Number	D63328
Product Category	Privacy
Openness Factor	<1%
Composition	100% Polyester
UV Blockage	Approximately 99%
Standard Packaging	Rolls of 30 ly (27 lm)
Width	118 in (300 cm)
Weight	6.20 oz/yd <sup>2</sup> (210 g/m <sup>2</sup> ) ±10%
Thickness	0.012 in (0.31 mm) ±10%

## Classifications

### Fire Classifications

### Bacterial & Fungal Resistance Environment

### Acoustical Performance

## Warranty

## Fabrication

### Avila Daylight™

ITEM	COLOR
000002	White
000017	Canvas
000020	Linen
000016	Chalk
000012	Frost

### Avila Twilight™

ITEM	COLOR	SIDE*
000002	White	Streetside
		Roomside
000017	Canvas	Streetside
		Roomside
000020	Linen	Streetside
		Roomside
000016	Chalk	Streetside
		Roomside
000012	Frost	Streetside
		Roomside
000018	Ash	Streetside
		Roomside
000001	Pewter	Streetside
		Roomside
000050	Graphite	Streetside
		Roomside
000060	Black	Streetside
		Roomside

## Care & Handling

**Mermet Corporation**  
 5970 N. Main Street ■ Cowpens, SC 29330  
 Ph 1.866.902.9647 ■ info@mermetusa.com

Sun Control Textiles™

[mermetusa.com](http://mermetusa.com)

### Avila Daylight™

Item Number	D63328
Product Category	Privacy
Openness Factor	<1%
Composition	100% Polyester
UV Blockage	Approximately 99%
Standard Packaging	Rolls of 30 ly (27 lm)
Width	118 in (300 cm)
Weight	6.20 oz/yd <sup>2</sup> (210 g/m <sup>2</sup> ) ±10%
Thickness	0.012 in (0.31 mm) ±10%

### Fire Classifications

ASTM E84 (Class A)  
 California Technical Bulletin #117  
 ASTM E2180, ASTM G21  
 RoHS - Lead Free, GREENGUARD Gold  
 NRC 0.05, SAA 0.03

5 Year Interior

**Cutting:** Cold, Ultrasonic Recommended | **Welding:** Heat Impulse, High Frequency. For exceptional weld bond strength, Mermet recommends our stocked adhesive film (item #103218).

We recommend testing all cutting and welding methods prior to use to confirm they meet your individual fabric specifications.

FABRIC					FABRIC + GLASS		ILLUMINANCE	
thermal Total Solar			optical		commercial			
Rs   %	As   %	Ts   %	Rv   %	Tv   %	SHGC	BLACKOUT%	GLOW%	
59	5	36	65	35	0.38	0	100	
51	9	40	54	39	0.42	0	100	
44	22	34	45	31	0.45	0	100	
48	15	37	50	36	0.43	0	100	
45	22	33	46	31	0.44	0	100	

FABRIC					FABRIC + GLASS		ILLUMINANCE	
thermal Total Solar			optical		commercial			
Rs   %	As   %	Ts   %	Rv   %	Tv   %	SHGC	BLACKOUT%	GLOW%	
68	32	0	74	0	0.25	99	1	
84	16	0	91	0	0.15	99	1	
69	31	0	74	0	0.25	94	6	
75	25	0	79	0	0.22	94	6	
68	32	0	74	0	0.25	99	1	
59	41	0	61	0	0.31	99	1	
68	32	0	74	0	0.25	98	2	
65	35	0	69	0	0.27	98	2	
69	31	0	76	0	0.24	99	1	
57	43	0	62	0	0.31	99	1	
69	31	0	76	0	0.24	100	0	
33	67	0	37	0	0.44	100	0	
67	33	0	74	0	0.25	100	0	
18	82	0	19	0	0.51	100	0	
68	32	0	76	0	0.25	100	0	
7	93	0	8	0	0.55	100	0	
68	32	0	74	0	0.25	100	0	
4	96	0	4	0	0.57	100	0	

\*Roomside: identified by the fabric side; Streetside: identified by the coated side.


Remove dust with vacuum cleaner or compressed air. Do not scrub. Do not use solvents or any abrasive substance which might damage the coating of the fabric. The front side of Avila is treated with DURAGUARD® Fabric Protector and in addition to DURAGUARD®, also treated with SANITIZED®. Therefore, Avila can be spot cleaned by gently blotting with a sponge or soft brush dipped in lukewarm soapy water using a mild detergent. The foam coating on the back side should not get wet. A dry chemical sponge or clean white pencil eraser can be used to remove small stains.

The fabric performance tests were conducted in accordance with ASTM E891 & ASTM E903-96: Solar Transmittance (Ts), Solar Reflectance (Rs), Solar Absorbance (As), Visible Reflectance (Rv), and Visible Transmission (Tv). Glass performance tests for Solar Heat Gain Coefficient (SHGC) were conducted using the Lawrence Berkeley National Laboratory Window 7.3 NFRC certified software. SHGC % improvement for commercial applications is based on a standard commercial glass makeup of Double Glazing 6 mm / 1/8" air / 6 mm with low E on surface #2. Results for SHGC were obtained using the center of glass. Acoustical performance was tested in accordance with ASTM C423-09a: NRC is Noise Reduction Coefficient, SAA is Sound Absorption Average. Blackout % is based on calculated luminosity using a 30s camera exposure with 100,000 incident lux. For up-to-date test results, performance specifications and larger samples, contact the Mermet Technical Department at: [www.mermetusa.com](http://www.mermetusa.com).

# Avila Twilight™

Privacy | 0% openness

Fire rated for residential applications

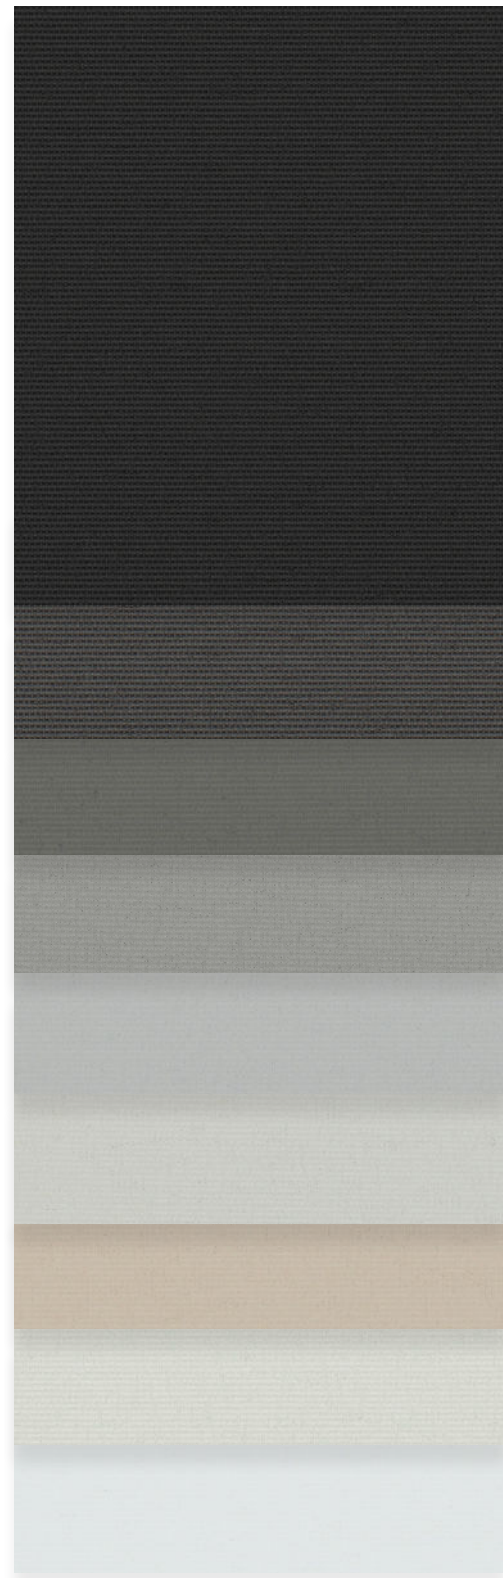

000060  
Black

000050  
Graphite

000001  
Pewter

000018  
Ash

000012  
Frost

000016  
Chalk

000020  
Linen

000017  
Canvas

000002  
White


# Avila Daylight™

Privacy | <1% openness

Fire rated for residential applications

## A Translucent, Light-Filtering Fabric

Introducing Avila Daylight, offered in the same five lightest colors of Avila Twilight, provides both privacy and natural daylighting while maintaining the option to be paired with Avila Twilight.

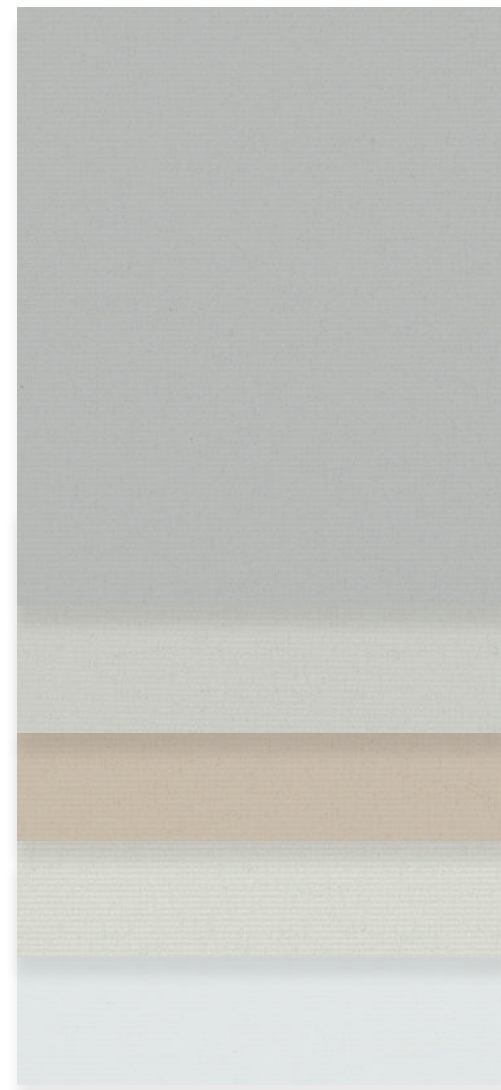

000012  
Frost

000016  
Chalk

000020  
Linen

000017  
Canvas

000002  
White



063328 | 000012  
Avila Twilight  
Frost

D63328 | 000012  
Avila Daylight  
Frost

0%

<1%